

Domopac CAT 5



The solution for poor commercial water pressure

- Non-corrosive holding tank
- Pre-fitted WRAS approved fill valve
- Integral screened overflow weir
- Minimal installation requirement
- Adjustable digital display flow controller
- Dry run protection with auto restart (time delay)
- Self priming jet pump
- Cat 5

The Domopac CAT 5 provides backflow protection for fluid category 5 risks. The system includes a type AB air-gap and has a water volume of 10 ltrs. We supply this tank with a self priming jet pump to ensure smooth operation. The electronic controller automatically starts and stops the pump when a drop in pressure is sensed (i.e. a tap is opened and closed).


Domopac CAT 5

Options

Model
10ltr CAT 5 Fixed Speed

System connections

Connection	Size
Inlet	3/4" BSP
Outlet	1" BSP
Overflow	40mm Wastepipe

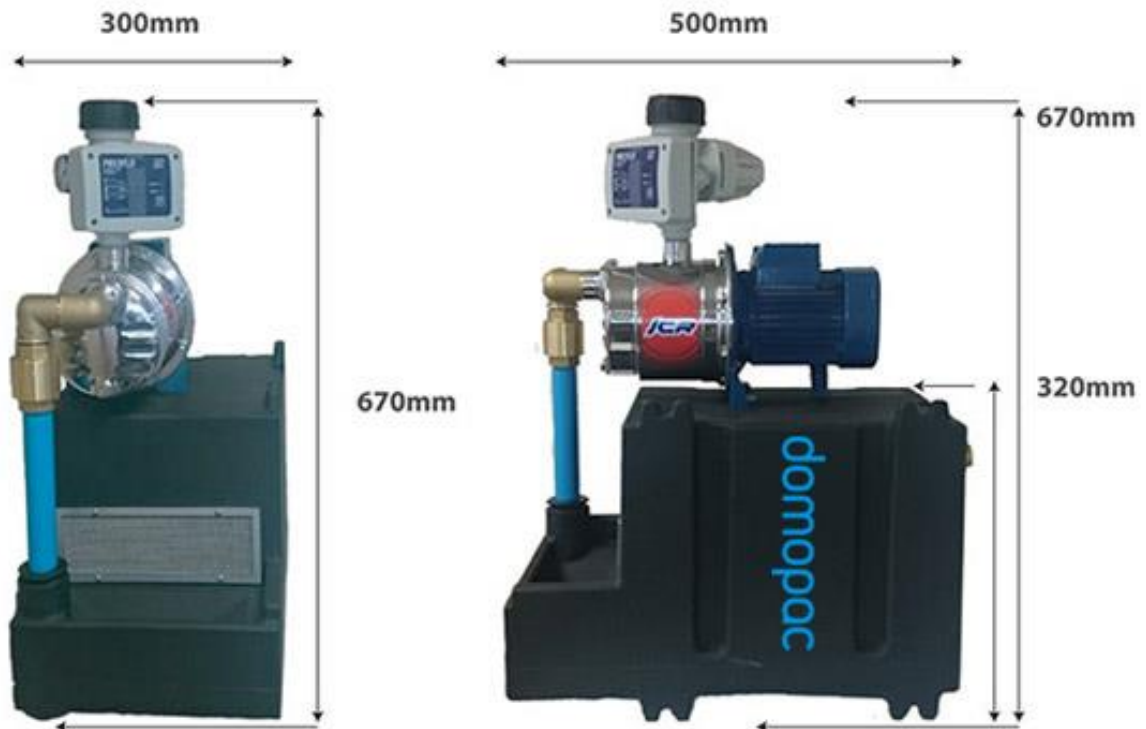

	Fixed speed option
Power supply	240 volt, 50Hz
Pump	JCRm1C-N
Controller	Presflo
Current input	3.4 amp
Mains Power Cable	2 mtr x 1mm ² 3 core fitted with 5 amp fuse main plug
Tank Weight Empty	14kg
Tank Weight Full	1ltr = 1 kg plus weight of empty tank
Access Cover Ø	N/A

Pump option	Power		Q I/min	0	5	10	20	25	30	40	45	50	60
	kW	HP											
JCRm1C-N	0.37	0.5	H Metres	35	32	28.5	23.5	21	18.5	15	13.5	12	10