

# Domopac Rectangular 270ltr



## *The solution for poor water pressure*

- Non-corrosive holding tank (WRAS approved material)
- Pre-fitted WRAS approved fill valve
- Minimal installation requirement
- Adjustable digital display flow controller
- Dry run protection with auto restart (time delay)

The Domopac Rectangular 270ltr is designed for houses and apartments where there is low mains water pressure and where pressure fluctuates. It is electronically controlled through a flow switch unit which starts and stops the pump automatically when a tap is opened and closed. The Domopac Rectangular 270ltr tank is designed for areas where height restrictions and access are an issue.


# Domopac Rectangular 270ltr

## Options

Model
270ltr Rectangular Fixed Speed

## System connections

Connection	Size
Inlet	½" BSP
Outlet	1" BSP
Overflow	1" BSP
Drain Off	1" BSP

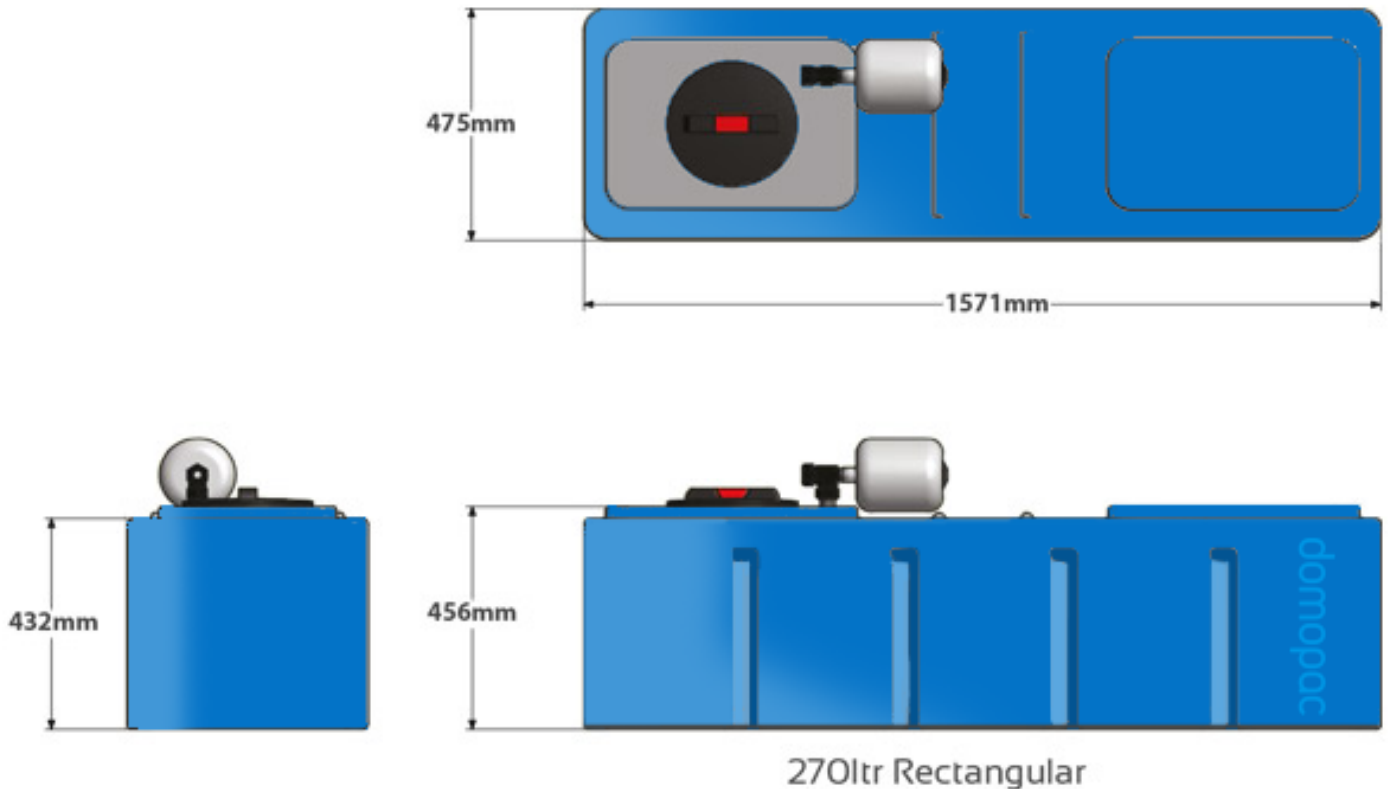

270ltr Rectangular

	Fixed speed option
Power supply	240 volt, 50Hz
Controller	Presflo Multi with integral 3 litre pressure vessel
Current Input	3.4 amp
Mains Power Cable	2 mtr x 1mm <sup>2</sup> 3 core fitted with 5 amp fuse main plug
Tank Weight Empty	32kg
Tank Weight Full	1ltr = 1 kg plus weight of empty tank
Access Cover Ø	190mm

Pump option	Power		Q I/min	0	10	20	30	40	50	60	70	80
	kW	HP										
Fixed speed	0.55	0.75	H Metres	42	40	38	34	30	24	18	11.5	5