

# Domopac Slimline



*The solution for poor domestic water pressure with limited floor space*

- Non-corrosive holding tank (WRAS approved material)
- Pre-fitted WRAS approved fill valve
- Protective lid enclosure as standard
- Minimal installation required
- Adjustable digital display flow controller
- Dry run protection with auto restart (time delay)

The Domopac Slimline can fit through a standard doorway. This makes it very convenient for new or existing properties as it can be easily fitted under a stairs, in a garage, or in a utility room. The Domopac Slimline is ideal for 3 - 5 bedroom houses, with poor water pressure and flow and where floor space is limited. It is electronically controlled through a flow switch unit which starts and stops the pump automatically when a tap is opened and closed.


# Domopac Slimline

## Options

Model
200ltr Slimline Fixed Speed
200ltr Slimline Variable Speed
300ltr Slimline Fixed Speed
300ltr Slimline Variable Speed

## System connections

Connection	Size
Inlet	½" BSP
Outlet	1" BSP
Overflow	1" BSP
Drain Off	1" BSP

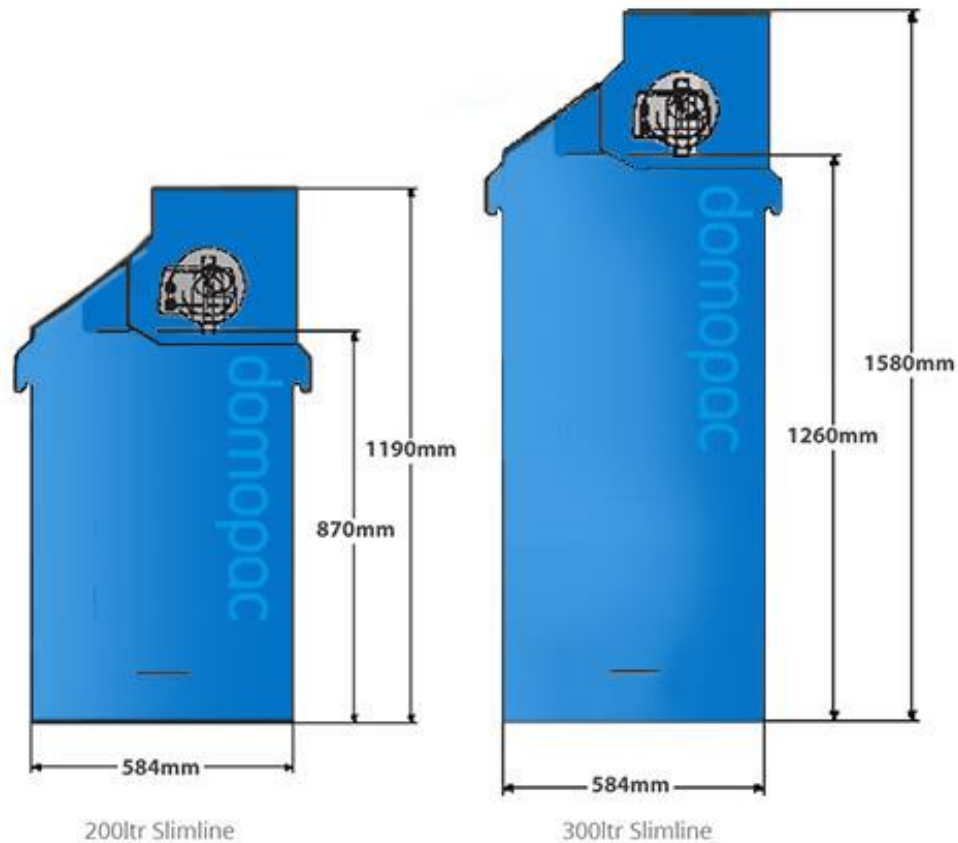

	Fixed speed option	Variable speed option
Power supply	240 volt, 50Hz	240 volt, 50Hz
Controller	Presflo Multi with integral 3 litre pressure vessel	Steadypres M/T 07 supplied with 8ltr pressure vessel
Current Input	3.4 amp	4 amp
Mains Power Cable	2 mtr x 1mm <sup>2</sup> 3 core fitted with 5 amp fuse main plug	2 mtr x 1mm <sup>2</sup> 3 core fitted with 5 amp fuse main plug
Tank Weight Empty	200ltr = 26kg   300ltr = 29kg	200ltr = 32kg   300ltr = 35kg
Tank Weight Full	1ltr = 1 kg plus weight of empty tank	1ltr = 1 kg plus weight of empty tank
Access Cover Ø	285mm	285mm

Pump option	Power		Q l/min	0	10	20	30	40	50	60	70	80
	kW	HP										
Fixed speed	0.55	0.75	H Metres	42	40	38	34	30	24	18	11.5	5
Variable speed	0.75	1	H Metres	63	61	59	57	54	50	45	39	31