

Domopac Utility 500ltr & 750ltr



The solution for poor domestic and light commercial water pressure

- Non-corrosive holding tank (WRAS approved material)
- Pre-fitted WRAS approved fill valve
- Protective lid enclosure as standard
- Minimal installation requirement
- Adjustable digital display flow controller
- Dry run protection with auto restart (time delay)

The Domopac Utility 500ltr & 750ltr are designed for domestic and light commercial use where there is low mains water pressure and where pressure fluctuates. They are electronically controlled through a flow switch unit which starts and stops the pump automatically when a tap is opened and closed. The Domopac Utility 500ltr & 750ltr are designed for areas where the floor space is not restricted. This range caters for a wider variation of tank options to suit a wider range of applications.


Domopac Utility 500ltr & 750ltr

Options

Model
500ltr Utility Fixed Speed
500ltr Utility Variable Speed
500ltr Utility Variable Speed Twin Pump
750ltr Utility Fixed Speed
750ltr Utility Variable Speed

System connections

Connection	Size
Inlet	½" BSP
Outlet	1" BSP
Overflow	1" BSP
Drain Off	1" BSP

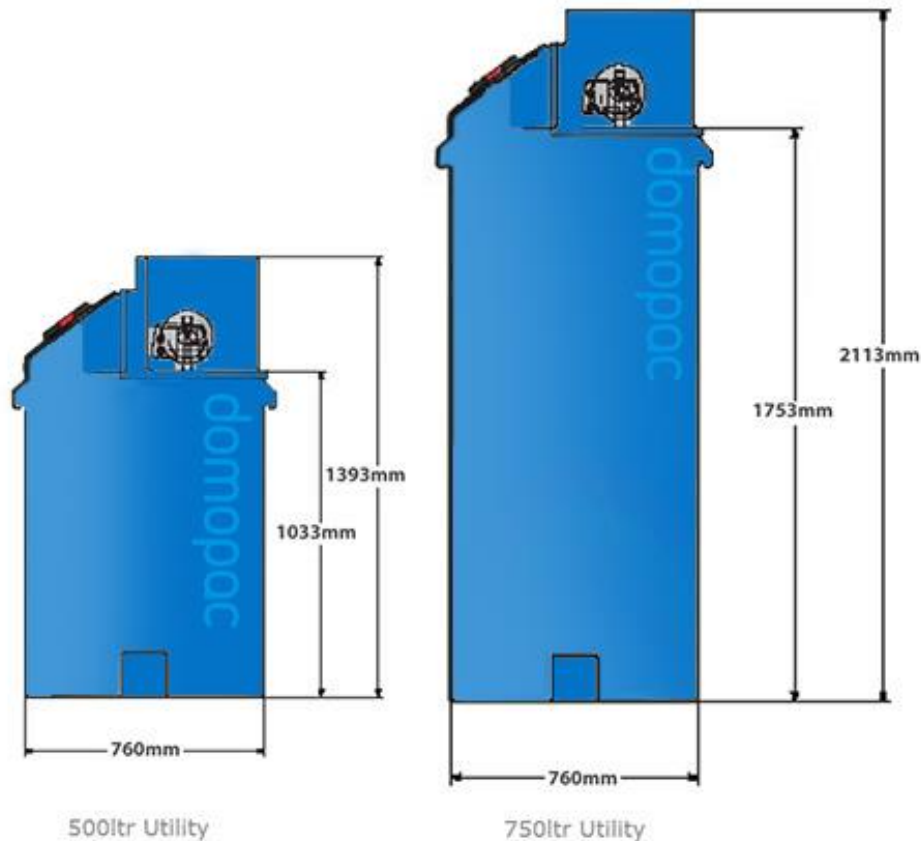

	Fixed speed option	Variable speed option
Power supply	240 volt, 50Hz	240 volt, 50Hz
Controller	Presflo Multi with integral 3 litre pressure vessel	Steadypres M/T 07 supplied with 8ltr pressure vessel
Current Input	3.4 amp	4 amp
Mains Power Cable	2 mtr x 1mm ² 3 core fitted with 5 amp fuse main plug	2 mtr x 1mm ² 3 core fitted with 5 amp fuse main plug
Tank Weight Empty	500ltr = 34kg 750ltr = 49kg	500ltr = 40kg 750ltr = 55kg
Tank Weight Full	1ltr = 1 kg plus weight of empty tank	1ltr = 1 kg plus weight of empty tank
Access Cover Ø	285mm	285mm

Pump option	Power		Q l/min	0	10	20	30	40	50	60	70	80
	kW	HP										
Fixed speed	0.55	0.75	H Metres	42	40	38	34	30	24	18	11.5	5
Variable speed	0.75	1	H Metres	63	61	59	57	54	50	45	39	31