

## Domopac Utility 650ltr & 1000ltr



*The solution for poor commercial water pressure*

- Non-corrosive holding tank (WRAS approved material)
- Pre-fitted WRAS approved fill valve
- Minimal installation requirement
- Adjustable digital display flow controller
- Dry run protection with auto restart (time delay)

The Domopac Utility 650ltr & 1000ltr are designed for commercial use on a larger scale where there is low mains water pressure and where pressure fluctuates. It is electronically controlled through a flow switch unit which starts and stops the pump automatically when a tap is opened and closed. The Domopac Utility 650ltr & 1000ltr are designed for areas where the floor space is not restricted. These products cater for a wider variation of tank options to suit a wider range of applications.


# Domopac Utility 650ltr & 1000ltr

## Options

| Model                                    |
|--|
| 650ltr Utility Fixed Speed               |
| 650ltr Utility Variable Speed            |
| 1000ltr Utility Fixed Speed              |
| 1000ltr Utility Variable Speed           |
| 1000ltr Utility Variable Speed Twin Pump |

## System connections

| Connection | Size   |
|------------|--------|
| Inlet      | ½" BSP |
| Outlet     | 1" BSP |
| Overflow   | 1" BSP |
| Drain Off  | 1" BSP |

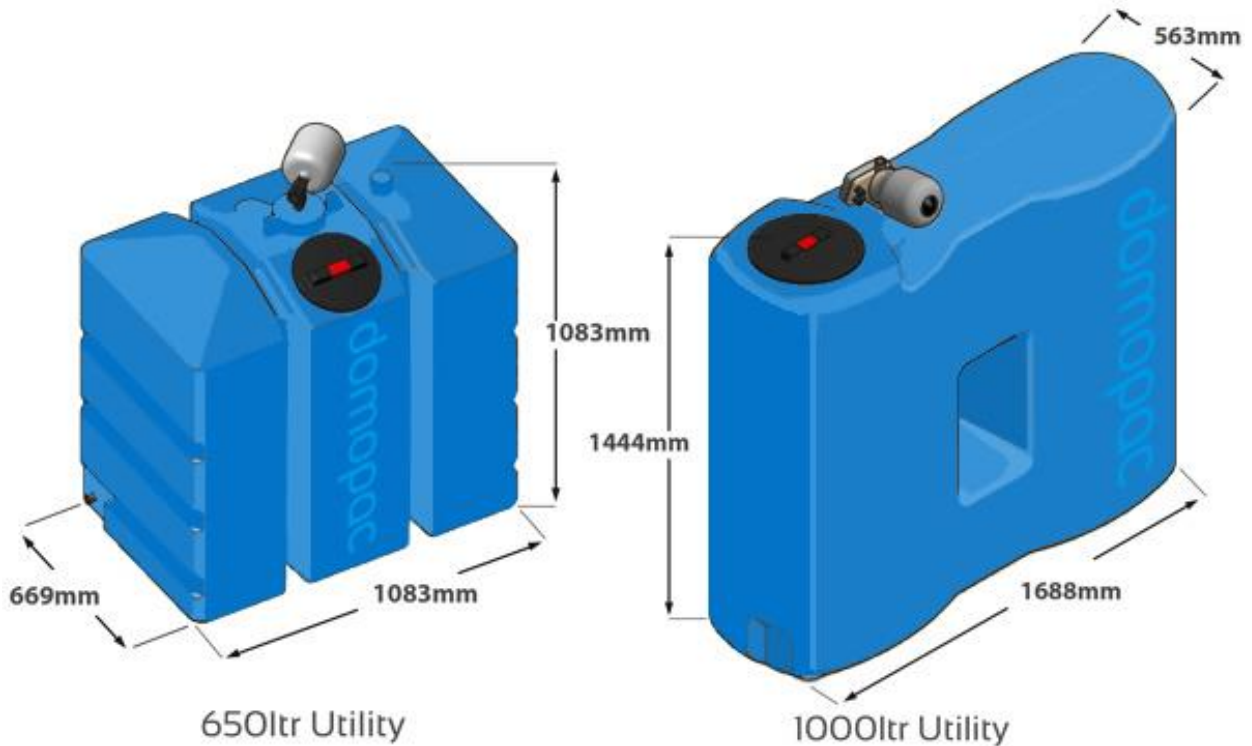

|                   | Fixed speed option   | Variable speed option  |
|-------------------|--|--|
| Power supply      | 240 volt, 50Hz   | 240 volt, 50Hz   |
| Controller        | Presflo Multi with integral 3 litre pressure vessel              | Steadypres M/T 07 supplied with 8ltr pressure vessel             |
| Current Input     | 3.4 amp  | 4 amp  |
| Mains Power Cable | 2 mtr x 1mm <sup>2</sup> 3 core fitted with 5 amp fuse main plug | 2 mtr x 1mm <sup>2</sup> 3 core fitted with 5 amp fuse main plug |
| Tank Weight Empty | 650ltr = 54kg   1000ltr = 74kg                                   | 650ltr = 60kg   1000ltr = 80kg                                   |
| Tank Weight Full  | 1ltr = 1 kg plus weight of empty tank                            | 1ltr = 1 kg plus weight of empty tank                            |
| Access Cover Ø    | 285mm  | 285mm  |

| Pump option    | Power |      | Q l/min  | 0  | 10 | 20 | 30 | 40 | 50 | 60 | 70   | 80 |
|----------------|-------|------|----------|----|----|----|----|----|----|----|------|----|
|                | kW    | HP   |          |    |    |    |    |    |    |    |      |    |
| Fixed speed    | 0.55  | 0.75 | H Metres | 42 | 40 | 38 | 34 | 30 | 24 | 18 | 11.5 | 5  |
| Variable speed | 0.75  | 1    | H Metres | 63 | 61 | 59 | 57 | 54 | 50 | 45 | 39   | 31 |